



SC-2655FWD-IOZ



Key Features



- High quality image with 5MP, 1/2.7" CMOS sensor
- 5MP (2688 x 1620)@25/30fps, 4MP(2560 x 1440)@25/30fps, 3MP (2304 x 1296)@25/30fps, 2MP(1920 x 1080)@25/30fps
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- Based on target classification, smart intrusion prevention significantly reduce false alarm caused by leaves, birds & lights etc., accurately focus on human, motor vehicle & non-motor vehicle
- Intelligent People Flow Counting & Crowd Density Monitoring
- LightHunter technology ensures ultra-high image quality in low illumination environment
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant and IP67 protection
- Support PoE power supply



Specifications


SC-2655FWD-I0Z					
Camera					
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS				
Min. Illumination	Color: 0.002Lux (F1.2, AGC ON) 0Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Shutter	Auto/Manual, 1 ~ 1/100000s				
Adjustment Angle	Pan: 0° ~ 360°		Tilt: 0° ~ 75°		Rotate: 0° ~ 360°
WDR	120dB				
S/N	>56dB				
Lens					
Lens	2.7 ~ 13.5mm, AF automatic focusing & motorized zoom lens				
Iris	Fixed				
Field of View (H)	106.25° ~ 30.42°				
Field of View (V)	56.36° ~ 17.22°				
Field of View (D)	110.34° ~ 34.18°				
DORI					
DORI Distance	Lens(mm)	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
	2.7	60.8	24.3	12.2	6.1
	13.5	303.8	121.5	60.8	30.4
Illuminator					
IR Range	Up to 40m (131ft) IR Range				
Wavelength	850nm				
IR On/Off Control	Auto/Manual				
Video					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
H.265 code profile	Baseline profile, main profile, high profile				
Frame Rate	Main Stream: 5MP(2880 x 1620), Max 30fps, 4MP(2560 x 1440), Max 30fps, 3MP(2304 x 1296), Max 30fps, 1080p(1920 x 1080), Max 30fps. Sub Stream: 720p(1280 x 720), Max 30fps, D1(720 x 576), Max 30fps, 640 x 360, Max 30fps. Third Stream: D1(720 x 576), Max 30fps, 640 x 360,Max 30fps, 2CIF(704 x 288), Max 30fps; CIF(352 x 288), Max 30fps.				
Video Bit Rate	128Kbps ~ 16Mbps				
U-Code	Support				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 4 areas				
ROI	Up to 8 areas				
Video Stream	Triple Streams				



Image	
White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal, Vertical, Horizontal, 180°, 90° Clockwise, 90° Anti-Clockwise
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Intelligent	
Smart Intrusion Prevention	Support false alarm filtering, cross line detection, intrusion detection, enter area detection, leave area detection
Statistical Analysis	People counting, support people flow counting & crowd density monitoring
Events	
Basic Detection	Motion detection, ultra motion detection, tampering alarm, audio detection
General Function	Watermark, IP address filtering, tampering alarm, access policy, ARP protection, RTSP authentication, user authentication
Audio	
Audio Compression	G.711U, G.711A
Audio Bitrate	64 Kbps
Two-Way Audio	N/A
Two-Way Audio	Support
Suppression	Support
Sampling Rate	8 kHz
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR, NAS(NFS)
Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS, SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK
User/Host	Up to 32 users. 2 user levels: administrator & common user
Security	Password protection, strong password, HTTPS encryption, Export operation logs, basic & digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE & digest authentication for ONVIF
Client	EZStation EZLive EZView
Web Browser	Plug-in required live view: IE 10 & above, Chrome 45 & above, Firefox 52 & above, Edge 79 & above Plug-in free live view: Chrome 57.0 & above, Firefox 58.0 & above, Edge 16 & above



Interface	
Audio I/O	Input: Impedance 35k Ω ; amplitude 2V [p-p]. Output: Impedance 600 Ω ; amplitude 2V [p-p]
Alarm I/O	I/I
RS485	N/A
Built-in Mic	N/A
Built-in Speaker	N/A
Wi-Fi	N/A
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
Certification	
EMC	CE-EMC (EN 55032: 2015+A1:2020,EN 61000-3-3: 2013+A1: 2019,EN IEC 61000-3-2: 2019+A1: 2021,EN 55035: 2017+A1:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)
Safety	CE LVD (EN 62368-1:2014+A11:2017) CB (IEC 62368-1:2014) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013) IK10 (IEC 62262:2002)
General	
Power	DC 12V $\pm$ 25%, PoE (IEEE 802.3af). Power consumption: Max 8.0W
Power Interface	$\varnothing$ 5.5mm coaxial power plug
Dimensions (L x W x H)	245 x 86 x 72mm (9.6" x 3.4" x 2.8")
Weight	0.92kg (2.0lb)
Material	Metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: $\leq$ 95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: $\leq$ 95% RH (non-condensing)
Surge Protection	6KV
Reset Button	N/A
Dimensions	

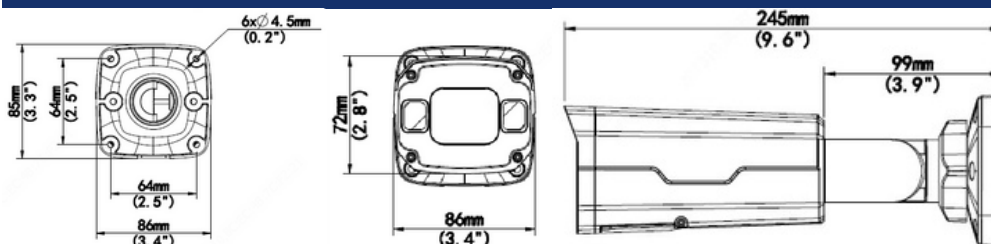

Accessories



TR-JB07-D-IN
Junction Box



TR-A01-IN
Waterproof Joint



TR-UP06-C-IN
Pole Mount