



DNC2COVERT-L4



Key Features



- 1/2.7" 4MP progressive scan CMOS
- Day/Night (Electronic), WDR
- 2.8mm fixed pinhole lens
- 8-meters cable
- Requires DNC2COVERT-ElBox to work together



Specifications

Camera					DNC2COVERT-L4				
Image Sensor		1/2.7" 4MP progressive scan CMOS							
Scanning System		Progressive							
Effective Pixels		1920 (H) x 1080 (V)							
Min. Illumination		0.007 Lux@F2.4 (Color, 1/3s, 30 IRE) 0.08 Lux@F2.4 (Color, 1/30s, 30 IRE) 0.004 Lux@F2.4 (B/W, 1/3s, 30 IRE) 0.04 Lux@F2.4 (B/W, 1/30s, 30 IRE)							
IR Distance		N/A							
IR On/Off Control		N/A							
IR LEDS		N/A							
Lens									
Lens Type		Fixed							
Mount Type		Board-in							
Focal Length		2.8mm							
Max. Aperture		F2.4							
Angle of View		Horizontal: 83° Vertical: 45°							
Optical Zoom		N/A							
Focus Control		Fixed							
Close Focus Distance		0.5m							
DORI Distance		Detect	Observe	Recognize	Identify				
		61m (200ft)	24m (78ft)	12m (39ft)	6m (19ft)				
Pan/Tilt/Rotation									
Pan/Tilt/Rotation Range		N/A							
Certifications									
Certifications		CE (EN60950:2000) UL: UL60950-1 FCC: FCC Part 15 Subpart B							




Environment

Operating Conditions	-30°C ~ +60°C (-22°F ~ +140°F), Less than 95%
Storage Conditions	-30°C ~ +60°C (-22°F ~ +140°F), Less than 95%
Ingress Protection	N/A
Vandal Resistance	N/A

Construction

Casing	Metal
Dimensions	30mm x 31mm x 29.3mm (1.18" x 1.22" x 1.15")
Net Weight	0.40 kg (0.88lb)
Gross Weight	0.47kg (1.03lb)

Dimensions

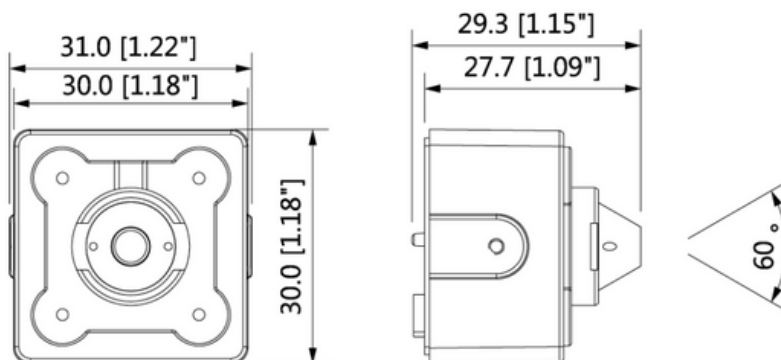

Installation

