



DCC2PMZB12XLR



Key Features



- Max. 30fps@1080p
- Starlight, 120dB true WDR, 3D NR
- Auto Focus, 5.3mm ~ 64mm motorized lens
- CVI, CVBS, AHD, TVI switchable
- Super Adapt and SMD Plus
- Max. IR Length: 100m, Smart IR
- IP67, IK10, AC24V, DC12V



Specifications

Camera		DCC2PMZB12XLR			
Pixel		2MP			
Image Sensor		2MP CMOS			
Max. Resolution		1920 (H) x 1080 (V)			
Scanning System		Progressive			
Electronic Shutter Speed		PAL: 1/25s ~ 1/100,000s NTSC: 1/30s ~ 1/100,000s			
Min. Illumination		0.001 Lux@F1.5 (Color, 30 IRE) 0.0001 Lux@F1.5 (B/W, 30 IRE) 0 Lux (Illuminator On)			
S/N Ratio		>65 dB			
Illumination Distance		100m (328.08ft)			
Illuminator On/Off Control		Auto			
Illuminator Number		4 (IR Light)			
Pan/Tilt/Rotation Range		Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°			
Lens					
Lens Type		Module			
Auto Focus		Yes			
Lens Mount		Module			
Focal Length		5.3mm ~ 64mm			
Max. Aperture		Horizontal: 59° ~ 5°, Vertical: 33° ~ 3°, Diagonal: 66° ~ 6°			
Iris Control		Auto			
Close Focus Distance		1m (3.28ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	73.1m (239.83ft)	29.2m (95.80ft)	14.6m (47.90ft)	7.3m (23.95ft)
	T	882.8m (2,896.33ft)	353.1m (1,158.46ft)	176.6m (579.40ft)	88.3m (289.70ft)

**Video**

Video Frame Rate	CVI: PAL: 1080p@25fps NTSC: 1080p@30fps AHD: PAL: 1080p@25fps NTSC: 1080p@30fps TVI: PAL: 1080p@25fps NTSC: 1080p@30fps CVBS: PAL: 960 x 576H NTSC: 960 x 480H
Resolution	1080p (1920 x 1080), 960H (960 x 576, 960 x 480)
Day/Night	Auto (ICR), Color, B/W
BLC	BLC, HLC, WDR, Auto
WDR	120dB
White Balance	Auto, area white balance
Gain Control	Auto
Noise Reduction	3D NR
Smart Motion Detection	Yes
Smart Illumination	Yes
Defog	Electronic Defog
Mirror	Yes
Privacy Masking	Off/On (8 areas, rectangle)

Certification

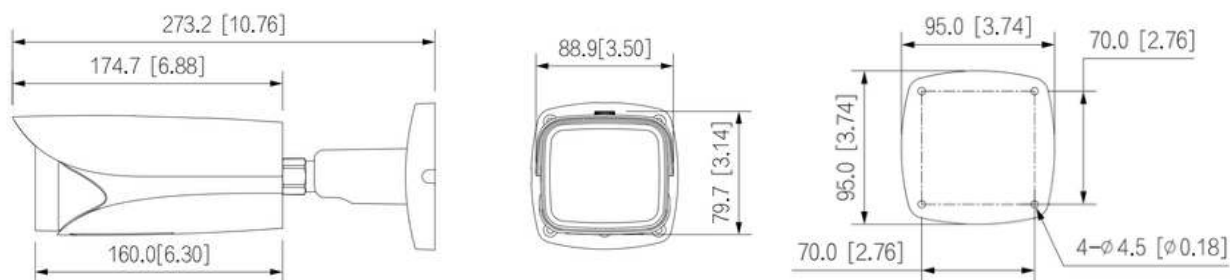
Certifications	CE (EN55032: 2015, EN61000-3-2: 2014, EN61000-3-3: 2013, EN55024: 2010+A1: 2015, EN55035: 2017, EN50130-4: 2011 + A1: 2014, EN62368-1: 2014 + A1: 2017) FCC (CFR 47 FCC Part 15 Subpart B, ANSI C63.4-2014)
----------------	--

Port

Video Output	Video output choices of CVI, TVI, ADH, CVBS
Audio Input	1-Channel audio in (RCA)
Alarm Input	1-Channel
Alarm Output	1-Channel
Menu Settings	1 Five (5) direction button



Test Port	1-Channel 2-Pin CVBS video output
Upgrade Port	1-Channel 4-Pin Ethernet input
Power	
Power Supply	12 VDC $\pm$ 10% 24 VAC $\pm$ 25%
Power Consumption	Max. 14W (12 VDC, IR On)
Environment	
Operating Temperature	-30°C ~ +60°C (-22°F ~ +140°F)
Operating Humidity	<95% (RH), Non-condensing
Storage Temperature	-30°C ~ +60°C (-22°F ~ +140°F)
Protection	IP67, IK10
Structure	
Casing	Metal
Product Dimensions	273.2mm x 95.0mm x 95.0mm (10.76" x 3.74" x 3.74")
Packaging Dimensions	340mm x 144mm x 124mm (13.39" x 5.67" x 4.88")
Net Weight	1.15kg (2.54lb)
Gross Weight	1.45kg (3.20lb)
Installation	Wall mount, ceiling mount, horizontal pole mount
Dimensions	

**Accessories**

PFA121
Water-Proof Junction Box



PFA152-E
Pole Mount Bracket